



PORTABLES &
GAS APPARATUS

MK SERIES

GAS HAND CUTTING TORCHES



SIMPLY BETTER BUILT.





Model MK-150
shown with 90° head



Model MK-250
shown with 75° head



Model MK-300
shown cutting with 75° head

MK Torches

- **Die Forged Head**
Increased strength and service life
- **Heavy Ribbed Handle**
Provides good ventilation and a sure handed grip on the torch.
- **Easy Grip Gas Valves**
Allows gloved hands to quickly and accurately set pre-heat flame.
- **Internal Tip Nut**
Protects threads in torch head.
- **Ease-On Cutting Valve**
Reduces slag blow back when piercing.



Model MK-36 at left with 90° head;
MK-48 at right with 75° head.

Wide Range of Torches


Five models of torches insure that the professional always has the right tool for the job.

Whether it be the light weight and compact MK-150 torch, the thick cutting MK-300 torch or even the extra long MK-48 torch, each torch is built with features that make it safe, durable and a perfect compliment for whatever application may come your way.


Koike Aronson . . .
“A Cut Above the Rest”.

Torches With All the Quality Components and Features You Would Expect from Koike Aronson

Includes MK-150, 250 and 300 models

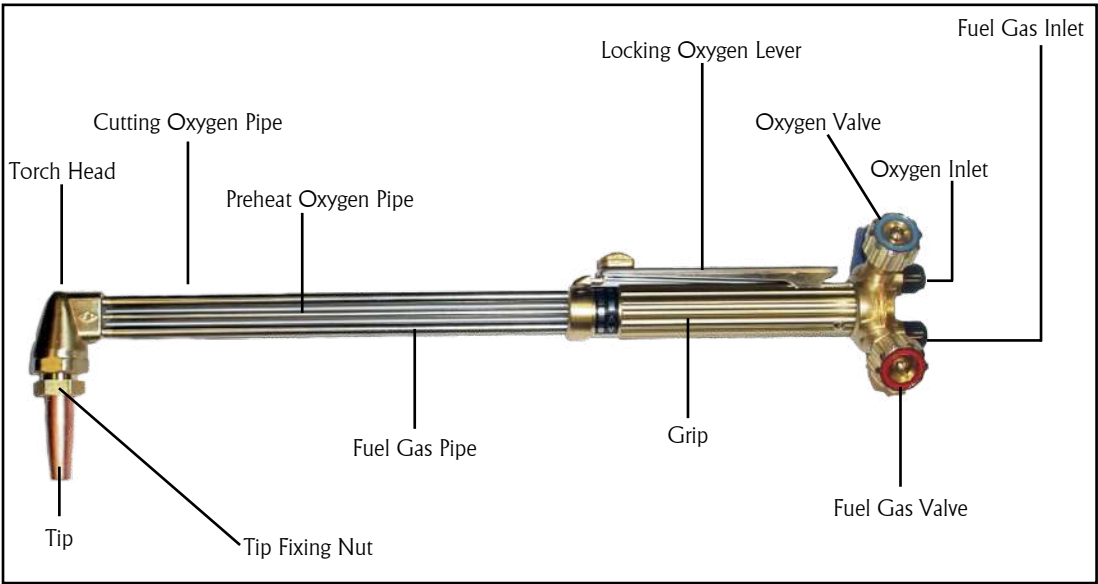

WARNING:
Flashback arrestors are recommended for safe operation.
(Refer to accessories under specifications)

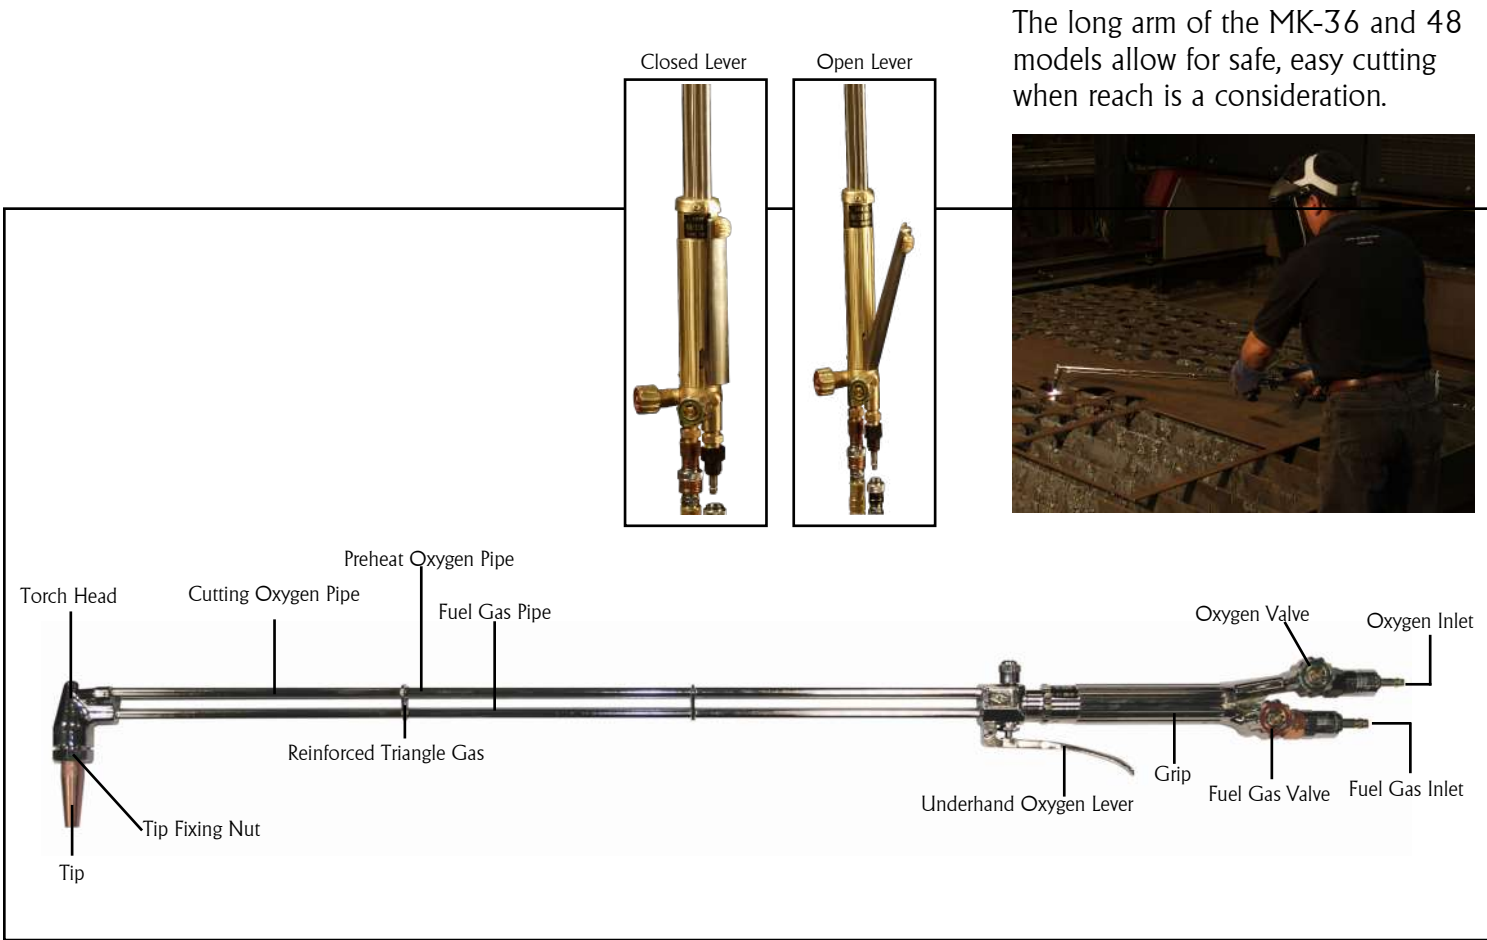

SPECIFICATIONS	MK-150	MK-250	MK-300	MK-36	MK-48
Torch Length	18.3 in (466mm)	21 in (525mm) standard*	26.4 in (661mm)	36 in (915mm)	48 in (1220mm)
Weight	2 lb (0.9kg)	3.3 lb (1.5kg)	3.4 lb (1.55kg)	3.3 lb (1.5kg)	4.0 lb (1.8kg)
Cutting Thickness	6 in (150mm) max.	10 in (250mm) max.	12 in (300mm) max.	8 in (200mm) max.	8 in (200mm) max.
Cutting Oxygen Lever	Locking with stop	Locking with stop	Locking with stop	Locking with stop	Locking with stop
Torch Head Angle	90°	75°, 90°, & 180°	90°	75° & 90°	75° & 90°
Fuel Gas	Any medium pressure fuel gas available	Any medium pressure fuel gas available	Any medium pressure fuel gas available	Any medium pressure fuel gas available	Any medium pressure fuel gas available
Hose Connection**	B type (9/16-18UNF) RHT/LHT	B type (9/16-18UNF) RHT/LHT	B type (9/16-18UNF) RHT/LHT	B type (9/16-18UNF) RHT/LHT	B type (9/16-18UNF) RHT/LHT
Locking Lever	Yes	Yes	Yes	No	No

MODELS DESCRIPTION	PART#
MK-150: 90° head, 18.3" length	DA228803
MK-250: 75° head, 21" length	3091330
MK-250: 90° head, 21" length	3091229
MK-250: 180° head, 21" length	3091331
MK-300: 90° head, 26.4" length	3091344
MK-36: 90° head, (MK-250 style torch), 36" length	ZA3091208
MK-36: 75° head, (MK-250 style torch), 36" length	ZA3091209
MK-48: 75° head, (MK-250 style torch), 48" length	3091224
MK-48: 90° head, (MK-250 style torch), 48" length	DA212812

ACCESSORIES	
Quick Couplers:	
Safety-Z Coupler WZO (Torch to Hose set)	ZA3232260
Super Sentinel Coupler (Locking coupler set with flashback arrestors)	ZA3232190
Flashback Arrestor:	
Sentinel Plus Flashback Arrestor (Regulator to Hose set)	SPFASET
Regulators:	
Custom-101 (oxygen)	CUSTOM101
Custom-202 (Acetylene, CGA-510)	CUSTOM202
Custom-206 (LPG, CGA, 510P)	CUSTOM206

Lifetime Warranty

When using genuine Koike cutting tips, receive a lifetime warranty against damaging flashback. Our cutting tips offer a unique flashback resistance feature. We're so confident in our torches and cutting tips, that if our torch sustains a damaging flashback while using a genuine Koike cutting tip, we will replace or repair the torch free of charge. (Damaged tip and torch must be returned to Koike)

Don't forget to add our Safety-Z couplers for added safety and convenience.



Custom Regulators - Koike's 101 single-stage oxygen regulator and 202 single-stage acetylene and 206 LPG regulators meet the industry needs for safety, reliability and economy. Assure your cutting, welding and heading operations to be safe and effective with Koike custom regulators.



Koike cutting tips



Super Sentinel & Safety-Z Coupling Sets



Koike Techno Center Products

Koike Aronson Inc.
P.O. Box 307, Arcade, New York 14009
Phone (585) 492-2400 Fax (585) 457-3517
www.koike.com

ISO 9001:2008
BUREAU VERITAS
Certification



V1-2510